

Swing doors

■ Injected 40 mm | ■ Polypropylene Injected 40 mm | ■ Polyethylene 15 mm | ■ Termoflex



Swing door



Leaf: thickness of 40 mm. Single or double leaf door.




- Suitable for working areas, corridors, transit areas etc.
- Finishes: white painted, PVC, stainless steel, polyester or Formica with anodised aluminium surrounding
- PUR or PIR insulation with a density of 40-45 kg/m³
- Oval vision panel made of methacrylate

Frame made of silver polished anodised aluminium prepared for any panel thickness or wall with wall anchors. Optionally, this door can be ordered with aluminium plate frame or stainless steel frame.

Hinges with stainless steel springs, 90° opening to both sides with or without blockade.

Accessories: colors of our standard color card or RAL card, glazed vision panel, frames for meat rail, ventilation grills, lock with key, teardrop protections and kickplates etc.



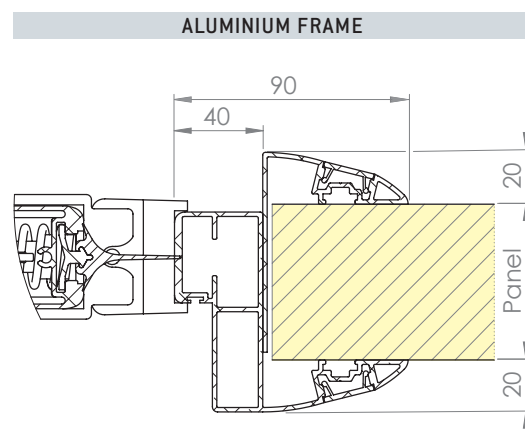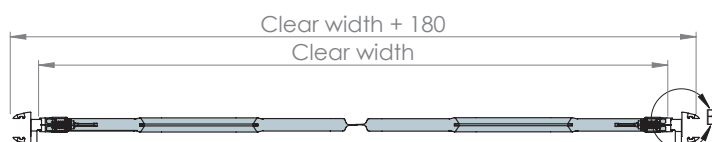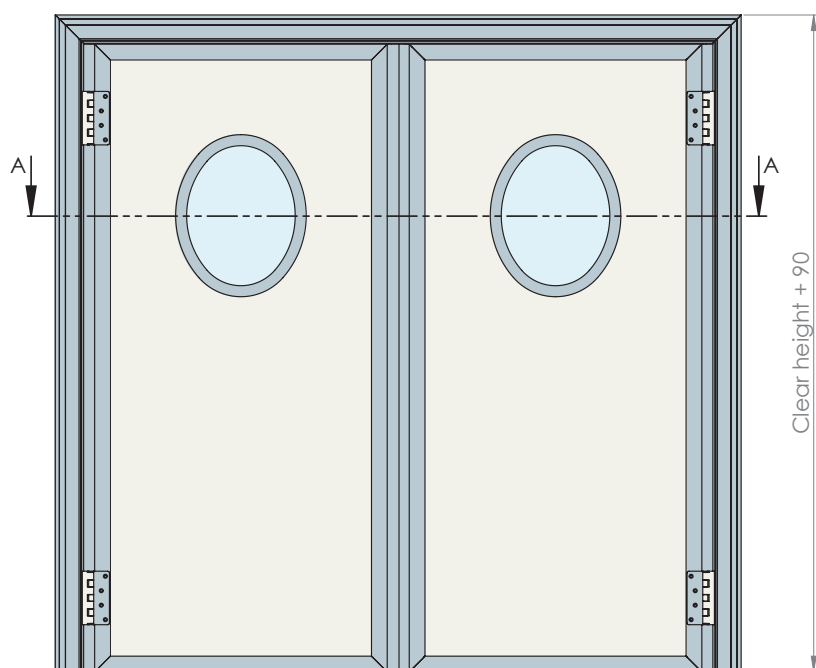

PANEL CUT-OUT	
Width	Height
40 + clear + 40	40 + clear



Swing doors polypropylene / polyethylene



Polypropylene

Leaf: thickness of 40 mm. Single or double leaf door.




- Very sturdy door with high impact resistance. Suitable for working areas, corridors, transit areas etc.
- Leaf made of 5 mm polypropylene on each face of the door, with a 30 mm PU-injection
- PUR or PIR insulation with a density of 40-45 kg/m³

Oval vision panel made of methacrylate

Frame made of silver polished anodised aluminium prepared for any panel thickness or wall with wall anchors. Optionally, this door can be ordered with aluminium plate frame or stainless steel frame.

Hinges with stainless steel springs, 90° opening to both sides with or without blockade.

Accessories: colors of our standard color card or RAL card, glazed vision panel, frames for meat rail, ventilation grills, lock with key, teardrop protections and kickplates etc.

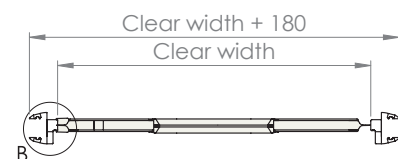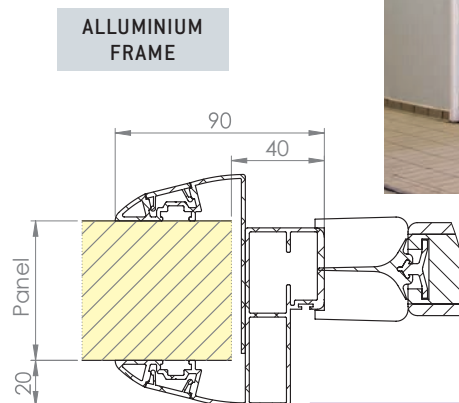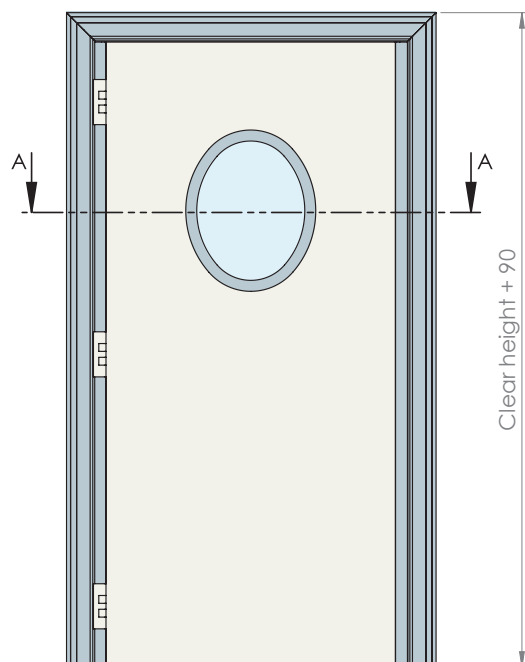

PANEL CUT-OUT

Width	Height
40 + clear + 40	40 + clear



Polyethylene






Leaf: thickness of 15 mm. Single or double leaf door.

- Very sturdy door with high impact resistance. Suitable for working areas, corridors, transit areas, also for aggressive ambience.
- Oval vision panel made of methacrylate
- Choice of colors

Frame made of silver polished anodised aluminium prepared for any panel thickness or wall with wall anchors. Optionally, this door can be ordered with aluminium plate frame or stainless steel frame.

Hinges with stainless steel springs, 90° opening to both sides with or without blockade.

Accessories: RAL colors, frame for meat rail, lock with key, PE kickplates etc.

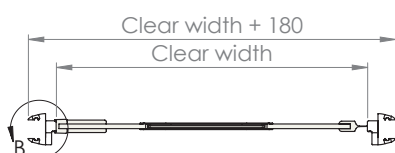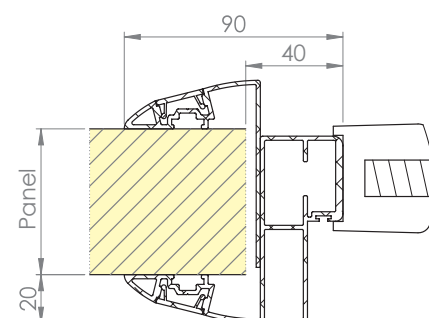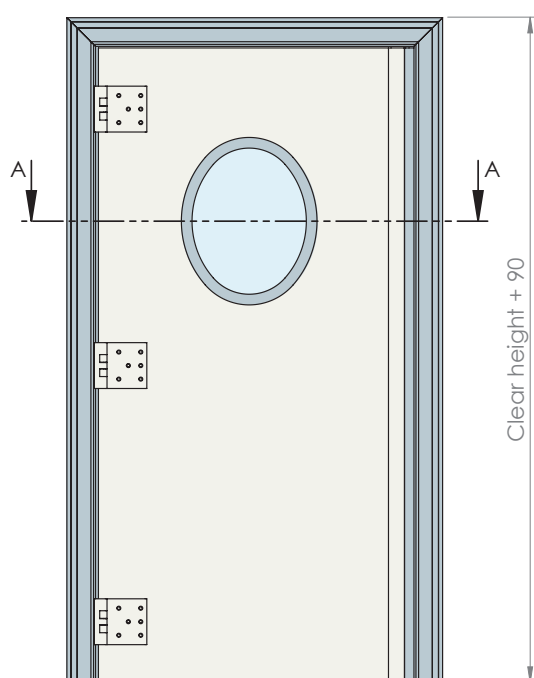

PANEL CUT-OUT	
Width	Height
40 + clear + 40	40 + clear

ALLUMINIUM
FRAME






Leaf made of PVC in 5 mm thickness

- Suitable for working areas, corridors, transit areas, also for aggressive ambience.
- Transparent, bi-coloured (blue and transparent) or PVC with mesh

Frame made of silver polished anodised aluminium prepared for any panel thickness or wall with wall anchors. Optionally, this door can be ordered with aluminium plate frame or stainless steel frame.

Hinges with stainless steel springs, 90° opening to both sides with or without blockade.

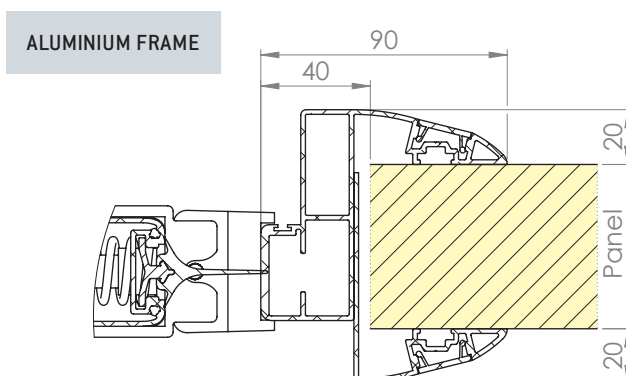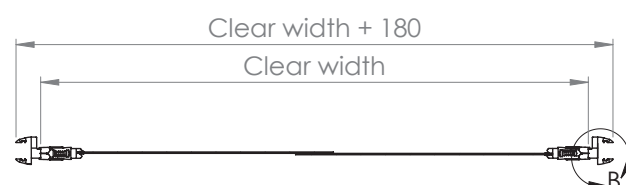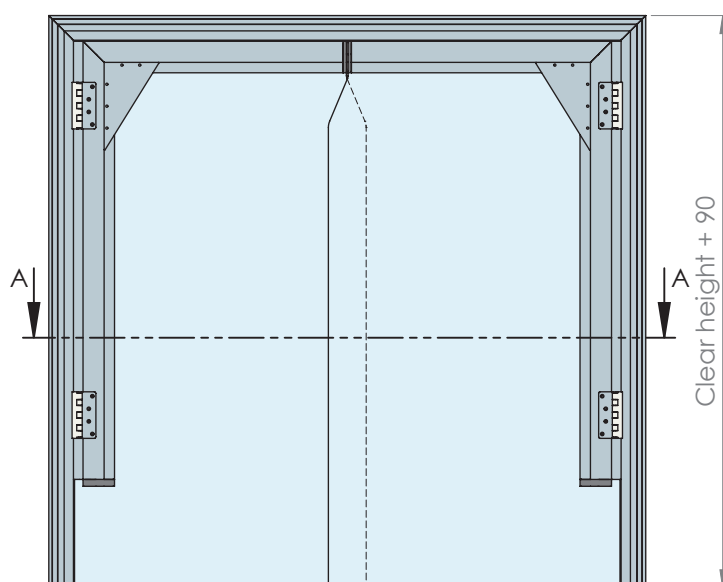


Accessories


Swing doors



Swing doors polypropylene

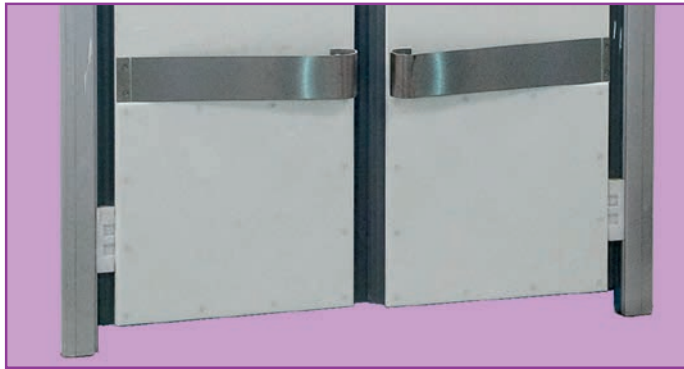


Swing doors polyethylene

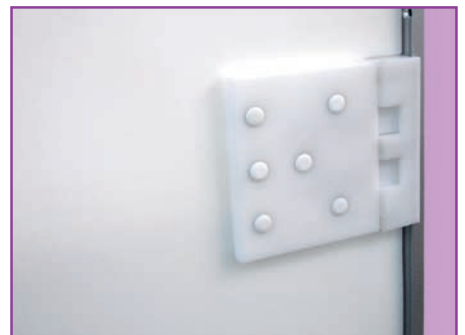

Termoflex



Puertas frigoríficas Insulated doors Portes frigorifiques
Kühlraumtüren Soğuk oda kapıları أبواب معزولة

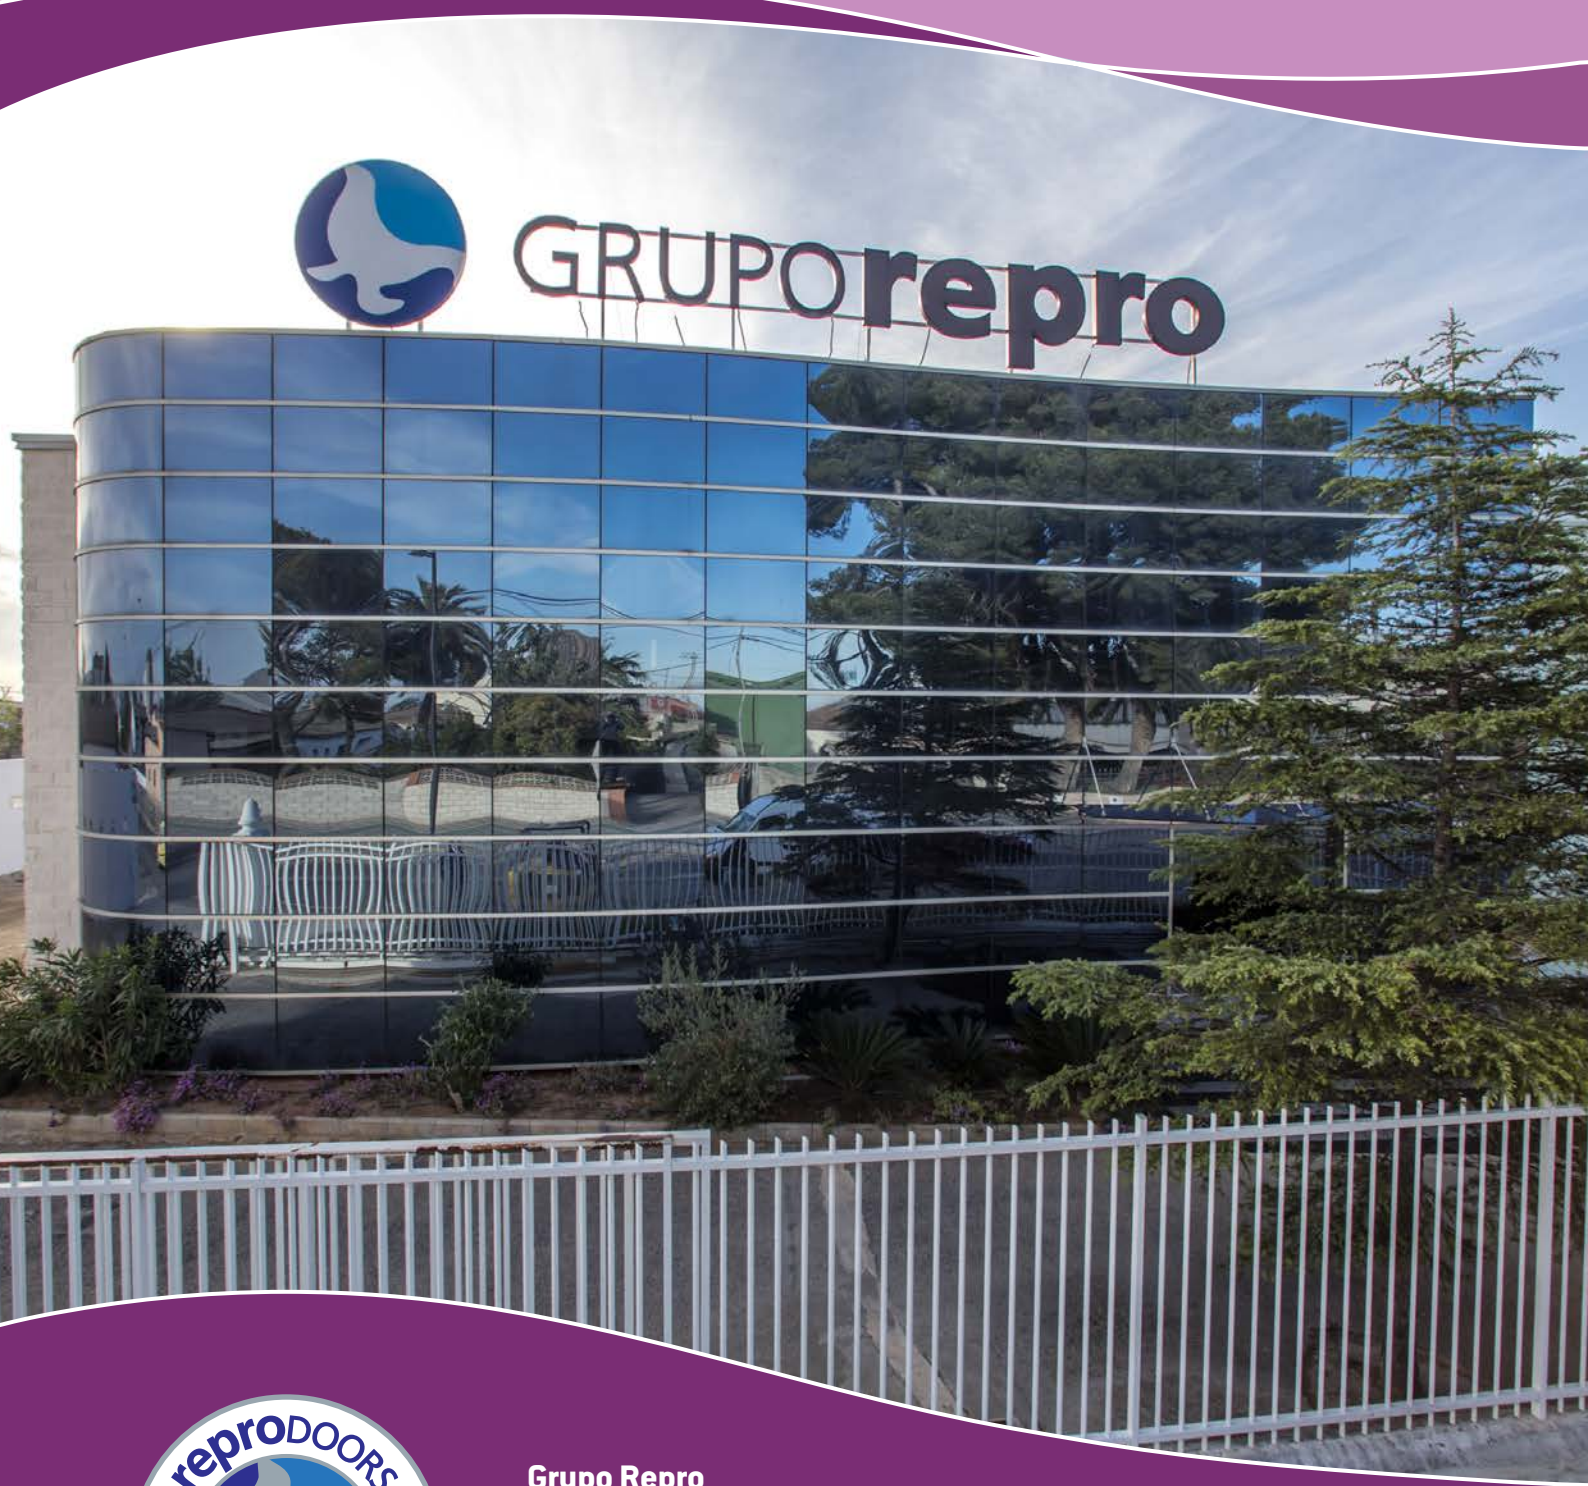

Grupo Repro

Avenida del Mar, s/n - Apartado de Correos 29

46410 SUECA (Valencia) Spain

Tel.: +34 96 171 80 05 - Fax: +34 96 170 09 00

www.repro.es - repro@repro.es